


SERIES R - 6201

Braided Flexible Metal Reducing Connectors (321 Stainless Hose with 304 Stainless Steel Braid and Carbon Steel Plate Flanges).

TABLE 3: Sizes • Offset • Working Pressures • Weights

| Expansion Joint Size: ID X ID X Length | Stock | Lateral Offset | | Working Press (PSI) | | Approx. Unit Ship Weight |
|---|-------|----------------|-----------|---------------------|--------|--------------------------|
| | | Intermittent | Permanent | @70°F | @300°F | |
| 3 X 2 1/2 X 9 | S | 1/8" | 3/8" | 345 | 303 | 14 |
| 4 X 2 X 9 | S | 1/8" | 3/8" | 455 | 400 | 14 |
| 4 X 2 1/2 X 9 | S | 1/8" | 3/8" | 345 | 303 | 14 |
| 4 X 3 X 9 | S | 1/8" | 3/8" | 289 | 254 | 16 |
| 5 X 3 X 9 | S | 1/8" | 3/8" | 289 | 254 | 22 |
| 5 X 4 X 9 | S | 1/8" | 3/8" | 300 | 264 | 25 |
| 6 X 3 X 9 | S | 1/8" | 3/8" | 289 | 254 | 23 |
| 6 X 4 X 9 | S | 1/8" | 3/8" | 300 | 264 | 30 |
| 6 X 5 X 11 | S | 1/8" | 3/8" | 220 | 193 | 35 |
| 8 X 4 X 11 | S | 1/8" | 3/8" | 300 | 264 | 58 |
| 8 X 5 X 11 | S | 1/8" | 3/8" | 220 | 193 | 58 |
| 8 X 6 X 11 | S | 1/8" | 3/8" | 200 | 176 | 61 |
| 10 X 6 X 11 | S | 1/8" | 3/8" | 200 | 176 | 80 |
| 10 X 6 X 11 | S | 1/8" | 3/8" | 190 | 167 | 85 |
| 10 X 8 X 11 | S | 1/8" | 3/8" | 190 | 167 | 85 |
| 12 X 8 X 12 | S | 1/8" | 3/8" | 190 | 167 | 105 |
| 12 X 8 X 14 | S | 1/8" | 3/8" | 190 | 1267 | 135 |
| 12 X 10 X 13 | S | 1/8" | 3/8" | 150 | 132 | 135 |
| 14 X 10 X 13 | X | 1/8" | 3/8" | 120 | 105 | 140 |
| 14 X 12 X 14 | X | 1/8" | 3/8" | 100 | 88 | 145 |

- NOTES:
1. "S" indicates stocked item.
 2. "X" denoted 1-2 week shipment lead time.
 3. Hose diameter equals smaller Flange I.D.

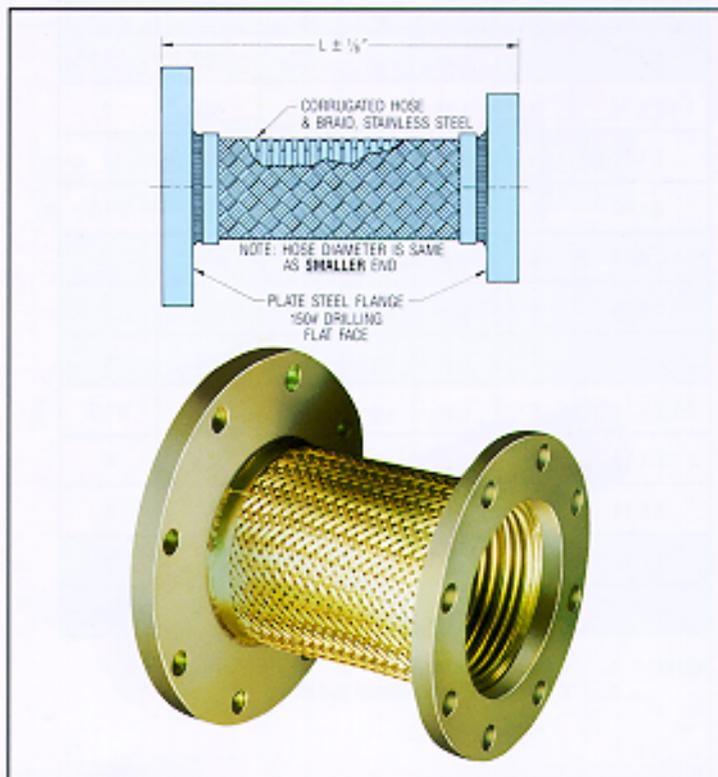

email: proco@inreach.com